

WASHING



FWH-65 TP2 HIGH SPIN WASHERS



Soft-Mount Fagor commercial FHS washers are easy to install on upper levels and over basements.

The 450 G-force extraction removes more water, reducing dryer time and energy consumption. Perfect for laundromats, hotels, hospitals, nursing homes, and more.

TOUCH PLUS CONTROL

- 7" touchscreen - intuitive and flexible programming
- USB Connection: software free of charge
- 37 languages, continually expanded
- Upload videos to display, use for ads, instructions, etc.

G-FORCE EXTRACTION

- 450G force extraction

CONNECTIVITY

- FagorKconnect - IoT
- Provided at NO extra charge
- Manage your laundry anywhere, at anytime, 24/7
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and much more.

EFFICIENCY

- Low energy and water consumption
- Speeds up the drying process, reducing energy costs and freeing up machines faster

VERSATILITY

- Soft Mount for easy installation
- Easily converts from OPL to COIN
- Electric or steam
- Wetcleaning ready, programmable
- Extraction speed and water levels easily programmed for applications such as wetcleaning, firehouse, etc.

ERGONOMICS

- Reversible doors, standard
- Industry leading large doors for easy loading and unloading

MAINTENANCE

- Hinged front control panel, easy and ergonomic access
- Technical menu, statistics for technicians
- Common parts across all models

MORE INFO


- Stainless steel front and top panels
- 3 water inlets
- CE, WRAS approved

OPTIONS

- FagorKconnect at no extra charge
- Auto unlock kit for door (in case of power failure) - recommended for vended laundries
- Silicon gasket
- 6 extra dosing signals
- Normally closed drain valve
- Double drain kit
- Leveling pads
- Automatic weighing sensor system on feet
- Ready for EcoTank
- Various Plinths for leveling machines from top, aligning door base at 850mm, and washing mops
- Extra dosing pump
- Sluice - Drum
- Tropicalized model: protected board (TOUCH II)
- Coin/token kit

DRUM		FWH - 65 TP2	
Load capacity 1:9 / 1:10	Lb.	68.4/61.7	
Volume	CU.FT	9.9	
Diameter	In	30.3	
Depth	In	23	
GENERAL DETAILS			
Washing speed / Spinning speed	r.p.m.	45/1024	
G Force		450 G	
Maximum force transmitted	KN	5.59 ± 2.1	
Frequency-dynamic force	Hz	15	
Noise level	dB	<70	
Vended / OPL		Yes / Yes	
Double drain		Opt.	
Weighing System / Tilting System	-	Opt./No	
SLUICE option		No	
DOOR			
Height center door / Height door	In	34.1/22.1	
Diameter	In	18.1	
POWER			
Motor	Hp	5.4	
Electric heating power	kW	18	
Total electric power (electric model)	kW	19.2	
Total electric power (hw, steam model)	kW	4	
CONNECTIONS			
Voltage 208-240/60/1~ + G	N° x AWG / A	-	3 x 12 / 20A
Voltage 208-240/60/3~ + G	N° x AWG / A	4 x 5 / 60A	4 x 12 / 20A
Voltage 440-480/3 ~ + G	N° x AWG / A	4 x 8 / 40A	
Steam inlet (Steam model)	inch	3/4"	
Maximum steam consumption (Steam model)	lbs/h	15	
Water inlet	inch	3/4"	
Water main pressure	Kg/cm2	2-4	
Maximum water consumption	Gal/ cycle	46.3*	
Drain	inch	3"	
Drainage capacity	Gal/min	52.8	
DIMENSIONS / PACKING DIMENSIONS			
Net Width / Gross Width	In	38.54/41.2	
Net Depth / Gross Depth	In	43.16/47.7	
Net Height / Gross Height	In	61.14/71.3	
Net weight / Gross weight	Lbs.	1257/1209.4	

* Programme No. 20, 75% load

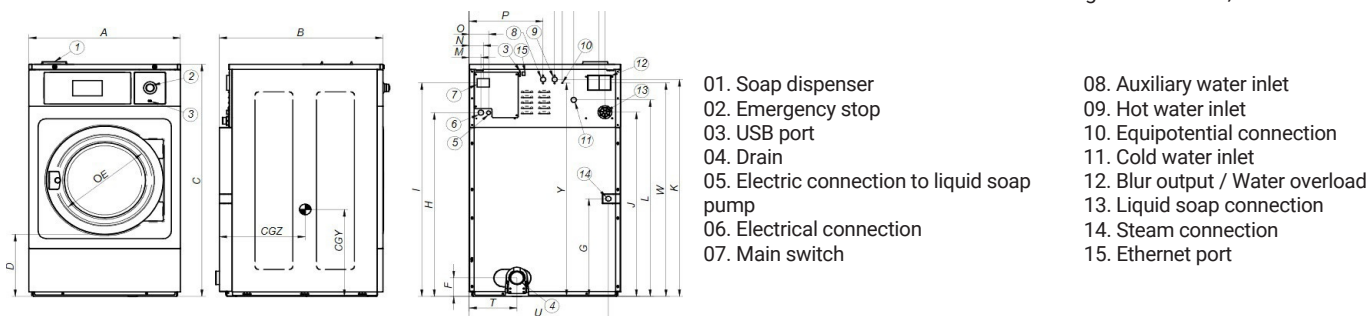

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
FWH-65	mm	979	1080	1550	560	460	125	490	1282	1450	1259	1465	1354	61	74	101	481	561	861	673	367	909	831	1424	624	1.510	773	735
	In	38.54	42.52	61.02	22.05	18.11	4.92	19.29	50.47	57.09	49.57	57.68	53.31	2.40	2.91	3.98	18.94	22.09	33.90	26.50	14.45	35.79	32.72	56.06	24.57	59.45	30.43	28.82